

## Slate and tile hooks

FOS can offer a variety of fixing solutions for facade and roof materials made of natural slate or fibre cement for different sizes and laying patterns.

We offer slate hooks, tile hooks and repair hooks in any length, for common tile thickness and in different materials.

Please do not hesitate to contact us if you are working with special dimensions or sub-constructions.



FOS drive-in slate and tile hooks are made with a nail tip. Diagonal cuts are also available for special dimensions.



The newly smoothed end of the clip reduces the risk of injuries.

Video  
Possible applications of  
slate and tile hooks



## Fixation and storm safety of covering materials for roofs and facades

We can offer you the most versatile clip range for fixing small format covering materials and professional wind uplift safety for roofs and facades in Europe.

All FOS products are made available through specialist dealers and industrial partners.

Our quick and easy-to-use roofing tools on [www.fos.de](http://www.fos.de) will assist you with the topic of storm protection.

### FOS ClipCHECK


With just a few clicks in our new product finder you can determine the perfect clip for your object.

### FOS CombiCHECK



The reverse search provides a list of cover materials you can use with the clips you already have in stock.

Friedrich Ossenberg-Schule GmbH + Co KG  
Amerikastraße 2  
58675 Hemer  
GERMANY

Tel. +49 (0) 2372. 558 99. 0  
Fax +49 (0) 2372. 558 99. 99 90  
[info@fos.de](mailto:info@fos.de)  
[www.fos.de](http://www.fos.de)

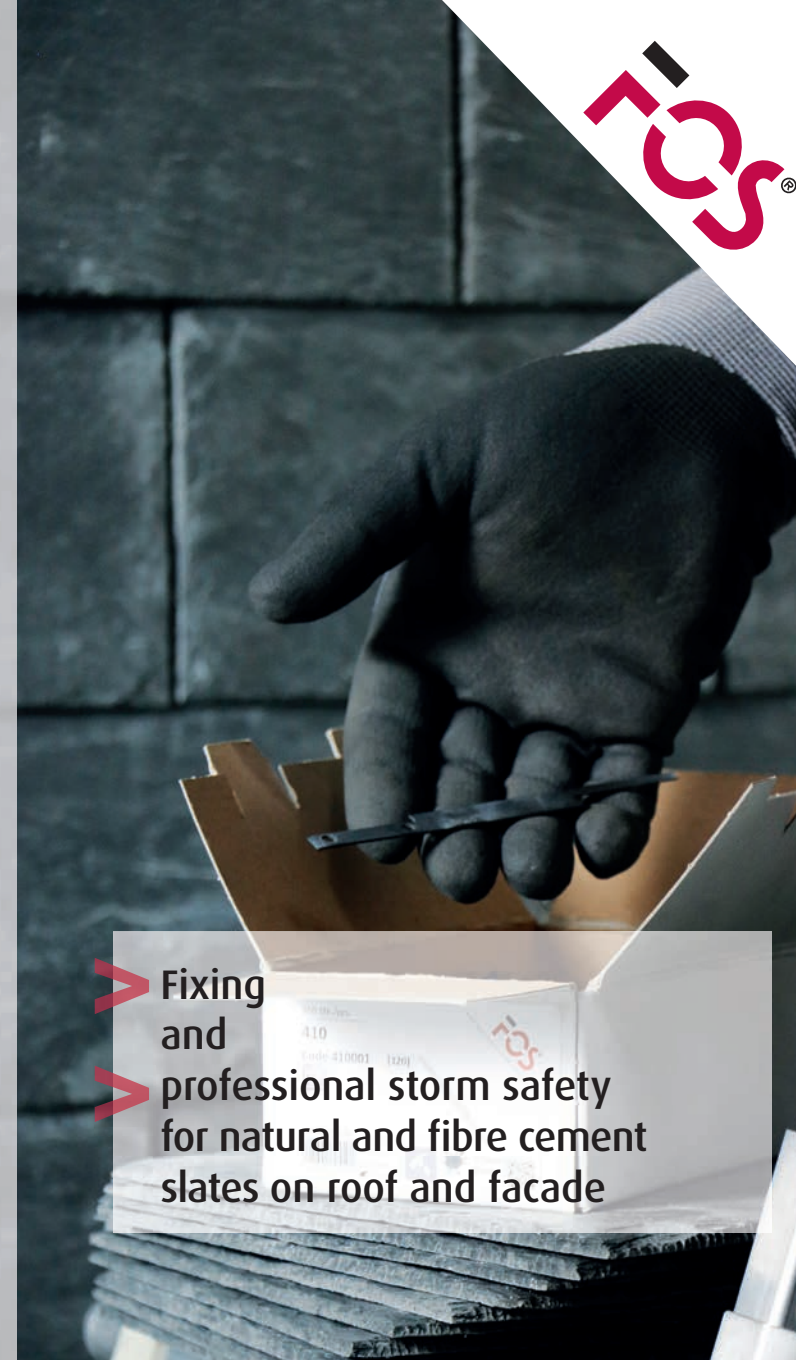


> Fixing  
and  
> professional storm safety  
for natural and fibre cement  
slates on roof and facade

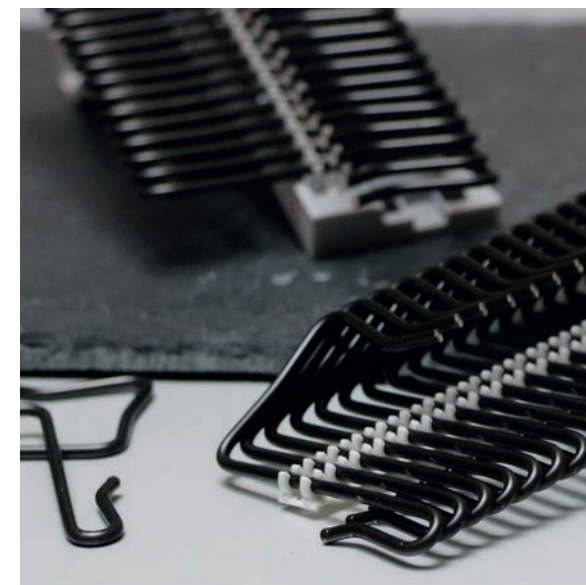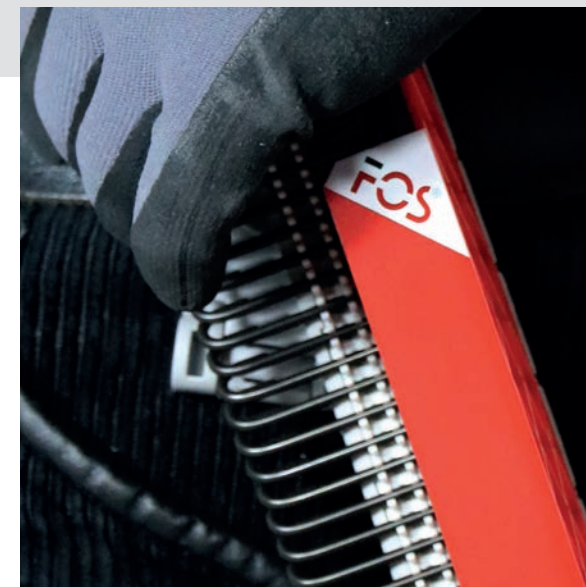

## Slate and tile hooks at a glance

## Tile hooks

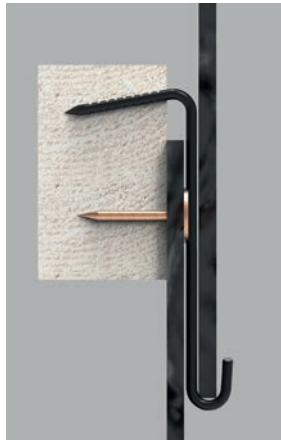

**404<sup>®</sup>-2** for **ClipFOS<sup>®</sup>HOLSTER**

Tile hooks have been used to fix fibre-cement slates for decades.


to drive in

The angle of the nail tip has been specially selected, so that the tile hook can be driven into the batten 10 mm above the slate. Fibre-cement slates are fixed with nails and, where necessary in addition with tile hooks. Tile hooks should be selected 10 mm longer than the head-lap.

The consistent thickness of fibre-cement slates enables the use of the straight hook type.

The 404<sup>®</sup>-2 hooks are delivered on magazine strips. Every strip holds 25 clips and is suitable for the mobile FOS ClipHOLSTER.

**440**



to mount on

## Slate repair hooks

Occasionally physical influences or adverse weather can result in broken slates. The defective slates must be replaced quickly to prevent moisture from penetrating into the sub-construction.

Slate repair hooks have been used successfully in practice for decades for quick and professional replacements on nailed or clipped surfaces.

**405d**

to drive in

**408**

to drive in

**410**




to nail

**411<sup>®</sup>**



to nail

Video  
Replacing a  
damaged slate



## Batten hooks



**460<sup>®</sup>-2** for **ClipFOS<sup>®</sup>HOLSTER**

Batten hooks have been used to fix natural slates or fibre-cement slates for decades.

Customized to the head-lap, standard batten size and slate thickness, the batten hook is a safe and quick-to-use fitting solution.

Batten hooks can be used for the standard slate formats and many covering types on sub-constructions which are made from battens or metal profiles.

The 460<sup>®</sup>-2 hooks are delivered on magazine strips. Every strip holds 25 clips and is suitable for the mobile FOS ClipHOLSTER.

to drive in

to mount on



Our new product locator determines the perfect clip for your object with a few clicks on [www.fos.de](http://www.fos.de).

Our tile and batten hooks are available in stainless steel, lacquered in black and some hook types in copper for different slate thickness.

## Nail end hooks



**461<sup>®</sup>-2** for **ClipFOS<sup>®</sup>HOLSTER**

Nail end hooks have been used to fix natural slates or fibre-cement slates for decades.

The nail end hook is a safe and easy-to-use fitting solution independent of the batten size and is customized to the slate thickness.

When using batten hooks, nail end hooks provide an additional fixing solution on the main batten in the counter or support base.

Nail end hooks can be used with the standard slate formats and many tiling styles on subconstructions made of timber batten or roof boards.

The 461<sup>®</sup>-2 hooks are delivered on magazine strips. Every strip holds 25 clips and is suitable for the mobile FOS ClipHOLSTER.



to drive in